


DrillPro

Hydraulic Return Filters


Services
Pty. Ltd.

- Service
- Parts
- Training

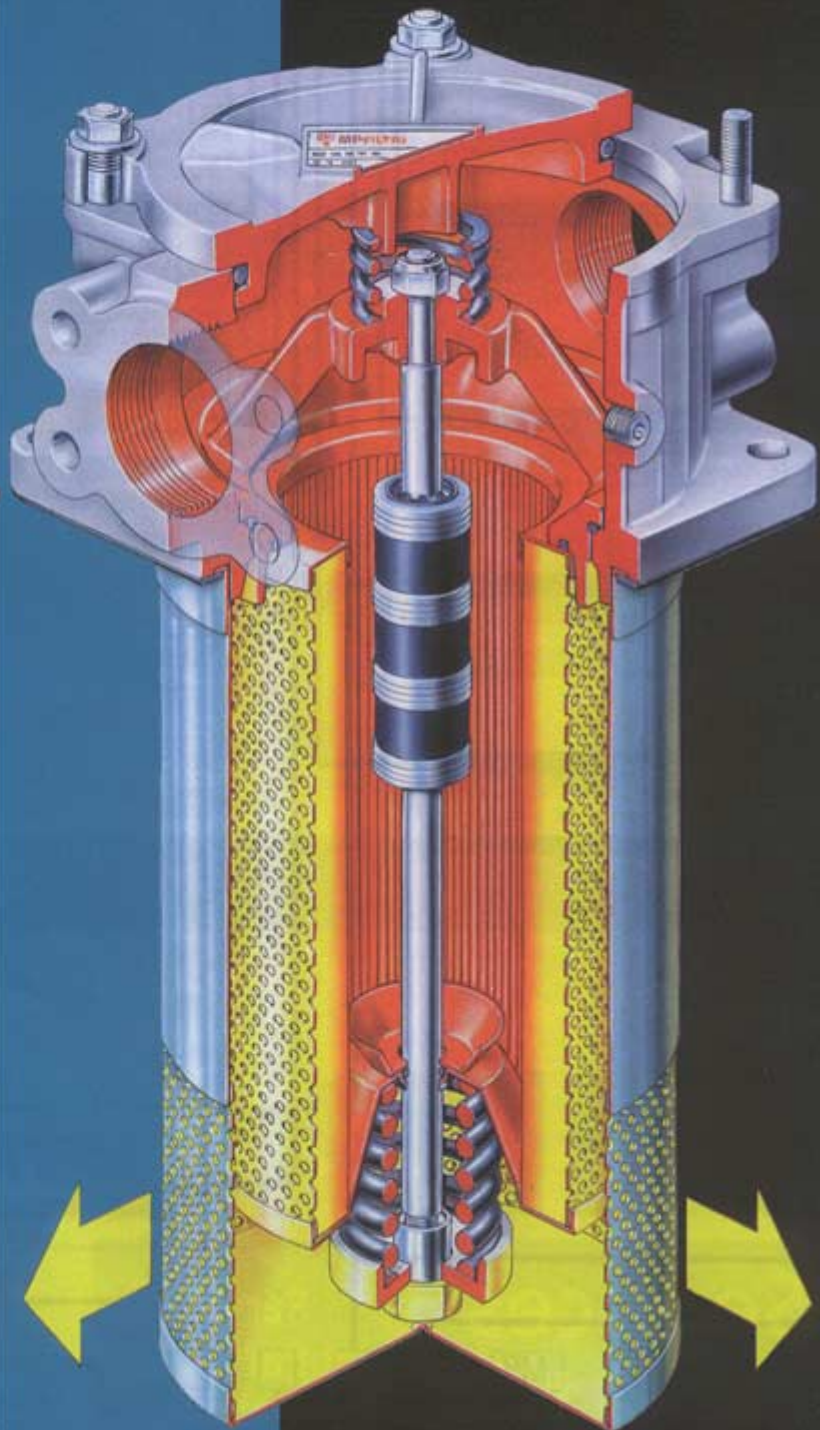


*Filters the oil from
the inside out*

*Genuine design,
filters oil from the
outside in!*

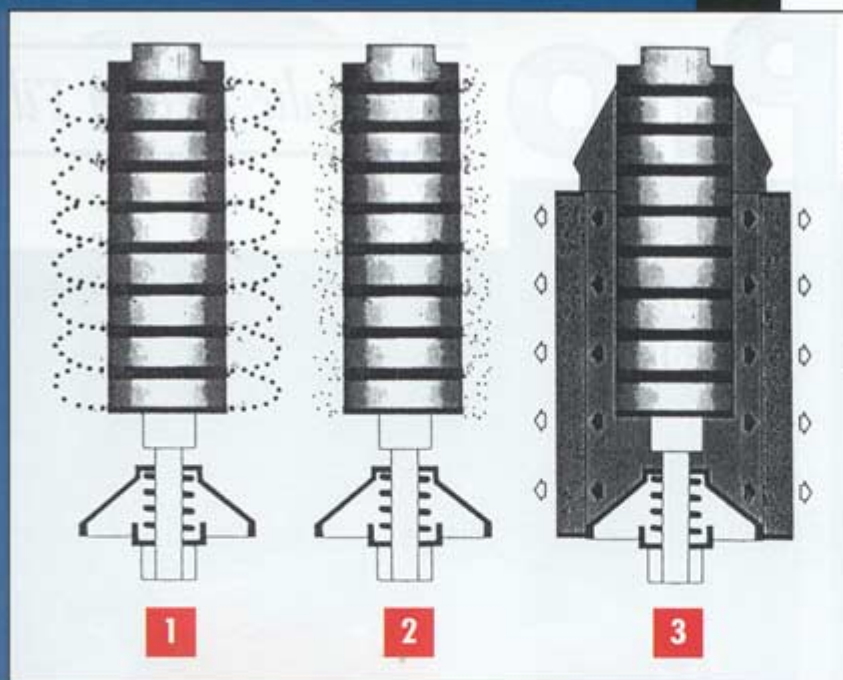

HYDRAULIC RETURN FILTER SYSTEM

1. Full Flow magnetic pre-filtration of ferrous particles upstream of the element.
2. Retention of contaminants on the magnets extends element life.
3. Fluid passes through the element in an 'inside to outside' direction, collecting all particles inside the filter cartridge. This eliminates contamination of the oil when the filter is removed from the tank.

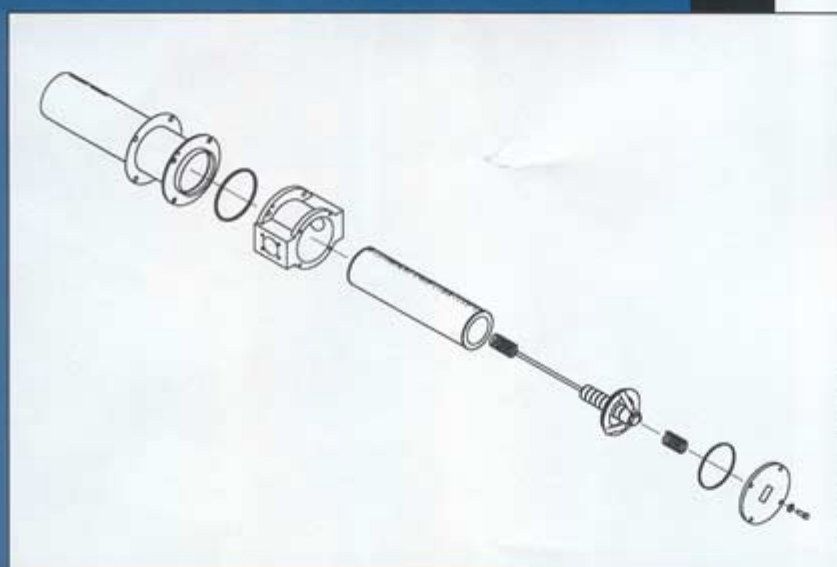

OPERATIONAL FEATURES

- The filter has internal magnets to trap particles.
- The elements are tough and simple to change.
- The use of a Diffusor prevents fluid aeration.
- Operating Temperature range: -40°C up to 120°C.
- Maximum pressure: 10 bar.

DrillPro

Services Pty. Ltd.

A.C.N. 080 786 965

- Service
- Parts
- Training

Hydraulic Return Filters

Unit 2 / 25 Lensworth St
Coopers Plains Q 4108

Phone: 61-7-3219 6355
Fax: 61-7-3219 5397